





● Generator Specification

Model	SE-K550C5		
Frequency	Hz	50	60
Prime power	kW/kVA	400/500	NA
Standby power	kW/kVA	440/550	NA
Rated voltage	V	380~415	220~480
Phase/Power factor	3Ph / 0.8		
Governor	ECU		
Performance	G3		

● Dimensions & Weight & Fuel Capacity

L*W*H	mm	4628*1600*2350
Weight	kg	Refer to drawing
Fuel Capacity	L	840



standards:ISO8528-5:2025(GB/T2820.5-2025),ISO12100:2010,I SO13849-1:2023,IEC60204-1:2016,IEC60947-1:2020,2006/42/E C Machinery safety, 2006/95/EC Low voltage

●**Prime Power (PRP):** For variable load applications, with no usage hours limit throughout the year; the average permissible output power over 24 consecutive hours shall not exceed 70% of the operating power.

●**Emergency Standby Power (ESP):** For applications during power outages or under test conditions, the maximum annual usage time shall not exceed 200 hours. The average permissible output power during 24 hours of continuous operation shall not exceed 70% of the standby rated power.

● Voltage & Current


Rate voltage	Current (50Hz)		Current (60Hz)	
	Rated	Standby	Rated	Standby
220V	NA	NA	NA	NA
380V	759.7A	835.7A	NA	NA
400V	721.7A	793.9A	NA	NA
415V	695.6A	765.2A	NA	NA
440V	NA	NA	NA	NA
480V	NA	NA	NA	NA

● Noise level

0% load & 7m	dB(A)	TBD
75% load & 7m	dB(A)	TBD

Control system

Controller	ComAp	IG500-G2
Breaker	Schneider	MCCB 4P 800A
Battery	Varta	6-QW-120(850)

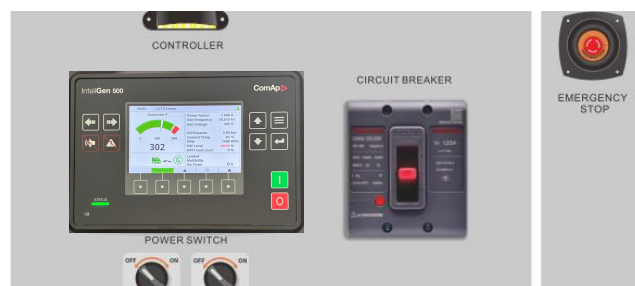

Diesel Engine

● Specification

Brand		Cummins	
Model		QSZ13-G10	
Rated speed	rpm	1500	1800
Rated power	kW	463	NA
Standby power	kW	509	NA
Compression ratio		17:1	
Cylinders		6	
Bore * stroke	mm	130*163	
Displacement	L	13	
Intake method		TA-A	
Low idle speed		700-1200	

● Lubrication system

Lub. Method	Fully forced pressure feed type		
Max. Oil Temp	°C	125	
Oil pan capacity	L	High level 75.3	
Oil pan capacity	L	Low level 61.2	

● Fuel consumption

		50Hz	60Hz
110% load	L/h	118	NA
100% load	L/h	107	NA
75% load	L/h	80	NA
50% load	L/h	54	NA
25% load	L/h	29	NA

Notes: (1) In accordance with GB19147-2006 automotive diesel fuel, standard 0# diesel fuel test, at 20°C, approximately 0.835 g/cm³. (2) Data sourced from the original diesel engine data sheet.

● Fuel system

Fuel pump type	XPI	
Feed pump	Mechanical	
Inlet pipe diameter	mm	M18*1.5-6g
Return pipe diameter	mm	M16*1.5-6H
Fuel filter	Full flow, cartridge type	

● Air intake & exhaust system

Maximum back pressure	kPa	13
Maximum intake resistance		
-Clean filter	kPa	3.7
-Dirty filter	kPa	6.2
Exhaust Gas Temperature	°C	NA

● Cooling system

Cooling method	Water-cooled	
Std. T-stat Temp	°C	82-94
Max. coolant temp (Prime)	°C	102
Max. coolant temp (Standby)	°C	102
Coolant capacity (Engine)	L	23.1
Coolant capacity (radiator)	L	63
Minimum Pressure Cap	kPa	103
Radiator	°C	50

● Electrical system

Control voltage	V	24
Starter power	kW	8.5
Battery power	CCA	850

Cooling method	Air-cooled
----------------	------------

Green Generation Company reserves the right to modify any function without prior notice. Weights and dimensions are based on standard products. Illustrations may include optional equipment. The technical data described in this catalog is consistent with the information available at the time of printing. Illustrations and images are for reference only and may not be identical to the actual product. Industrial designs are patent pending.

Key Features

- Heavy-duty, direct-injection, water-cooled diesel engines offer maximum reliability;
- Vertical shaft fan-cooled closed-type water tank radiator;
- Brushless alternators reduce maintenance requirements and meet H/H level insulation and temperature rise requirements;
- Automatic voltage regulators (AVR) enable precise voltage regulation;
- The heavy-duty chassis features a sheet metal structure, and the engine and generator are fitted with natural rubber shock absorbers connected to the chassis to minimize unit vibration.
- The silent, soundproof, weather-resistant steel shell. The fully enclosed design ensures safe operation without human intervention. The built-in fuel tank is equipped with a direct-reading mechanical fuel gauge.
- Powder coatings with advanced pretreatment and spraying processes are durable and waterproof.
- The standard configuration includes an oil-water separator, which can effectively remove some of the water from the fuel and extend the engine's service life
- The automatic start/stop control function allows the generator to start automatically in the event of a public power outage;
- A comprehensive engine and generator detection and protection system that monitors and protects parameters such as water temperature, oil pressure, voltage, and power in real time.
- Standard configuration includes a 3-pole main circuit breaker .
- Standard configuration includes Varta maintenance-free batteries, battery negative terminal circuit breaker, and battery charger.
- Complete technical documentation, including: generator set instruction manual, outline drawings, electrical schematics, and accompanying materials for the engine and generator.

Optional Features

- ☐ Heavy-duty desert air filter & cyclone air filter pre-filter
- ☐ Fuel-water separator with manual/electric oil pump
- ☐ Fuel-water separator with electric heating and electric oil pump
- ☐ Oil heater
- ☐ AC/Fuel Heated Water Jacket Heater
- ☐ Manual oil drain pump
- ☐ Remote water tank and heat exchanger
- **Alternator**
 - ☐ PMG/AREP Excitation system (base number ≥ 224)
 - ☐ Harsh Environment Protection
 - ☐ Air intake filter (Power drop 5%)
 - ☐ IP44 protection grade (Power drop 10%)
 - ☐ Winding RTD (Winding Temperature Sensing Component)
 - ☐ Bearing RTD (Bearing Temperature Measurement Component)
- **Electrical components**
 - ☐ RS485, 4G and GPS Wireless communication card
 - ☐ ABB or Schneider main circuit breaker
 - ☐ 4P breaker
 - ☐ Electric circuit breaker (standby current ≤ 1600A)
 - ☐ AGM Maintenance-free batteries (non-hazardous goods)
 - ☐ Automatic parallel/synchronization system
 - ☐ ATS cabinet (Dual power transfer cabinet)
 - ☐ Aviation sockets (European /Australian standard, etc.)
 - ☐ Other brands/models of controllers
- **Mechanical structure**
 - ☐ Independent steel fuel tank (500 ~ 6600L)
 - ☐ Silent 12 & 24-hour fuel tank
 - ☐ Double-walled fuel tank
 - ☐ Trailer chassis
 - ☐ Air intake/exhaust noise reduction array
 - ☐ Quick switch for built-in and external fuel tanks